




Data Sheet

CM-100


Condenser Measurement Microphone



Frequency Response

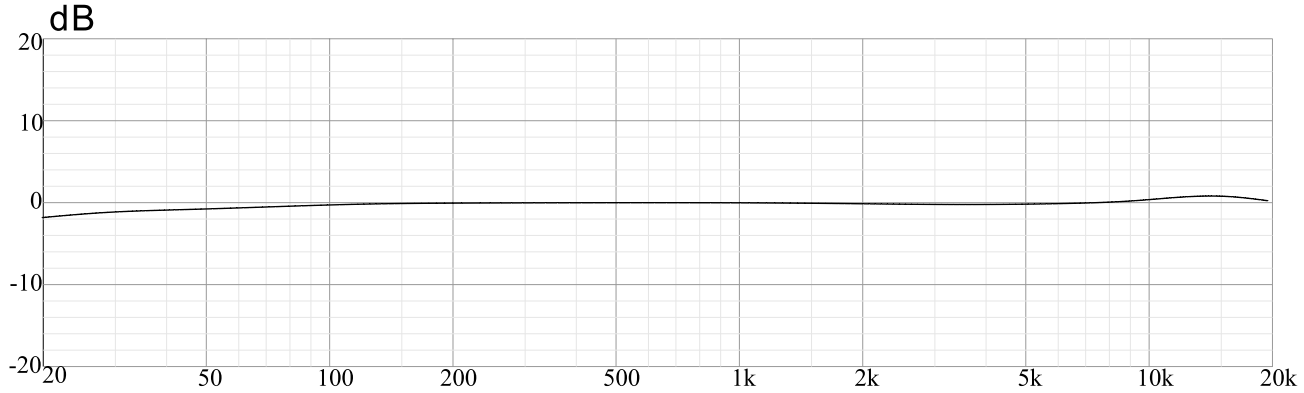

Polar Pattern

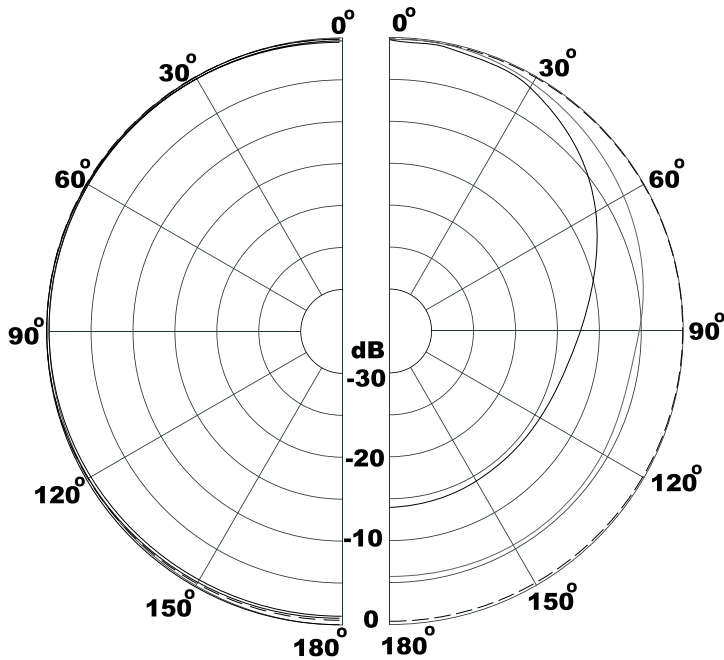

- 250 Hz
- - - 500 Hz
- · · 1K Hz
- 2K Hz
- 4K Hz
- 8K Hz
- 16K Hz

Specifications

Transducer Type	Omni-directional electret condenser
Impedance	600 Ohms
Sensitivity	-40dB (0dB = 1V/Pa)
Frequency Response	20Hz-20kHz
Current Consumption	<2mA
Maximum SPL	>120dB
Connector	Gold-plated XLR
Phantom Power	15-48V
Dimensions	Diameter: 0.87" (22.22 mm) Length: 7.5" (190 mm)
Weight	4 oz (120 g)